

BLADE

SERIES

Automotive Data Solutions Inc.

INSTALL GUIDE

BLADE-AL(DL)-NI1-EN

NI1

AVAILABLE FOR: ADS-BLADE AL

Rev. Date: November 19, 2020

Doc. No.: ##72679##

PATENT NO. US 8,856,780 CA 2759622

PLEASE VISIT WWW.IDATALINK.COM FOR COMPLETE PRODUCT DETAILS

The brand names and logos found in this guide are property of their respective owners. Automotive Data Solutions Inc. © 2020




I N F I N I T I

NISSAN

TERMS OF USE: Automotive Data Solutions Inc. ("ADS") products are strictly intended for installation by Certified Technicians who are employed by a registered business specialized in the installation of automotive aftermarket electronics products. Prior to beginning installation of an ADS product in a vehicle, it is the Certified Technician's responsibility to review the most current Product Guide, Install Guide and vehicle-specific notes available in Weblink®. ADS is not responsible for any damages whatsoever, including but not limited to any consequential damages, incidental damages, damages for loss of time, loss of earnings, loss of profit, commercial loss, loss of economic opportunity and the like that may or may not have resulted from the use, misuse, improper installation or operation of its products. Purchasers sole contractual remedy is refund of the purchase price of the ADS product(s). ADS reserves itself the right to suspend any Weblink® account without notice and decline to offer technical support to non-Certified Technicians, non-compliant Certified Technicians or end users.




COMPONENT LOCATOR

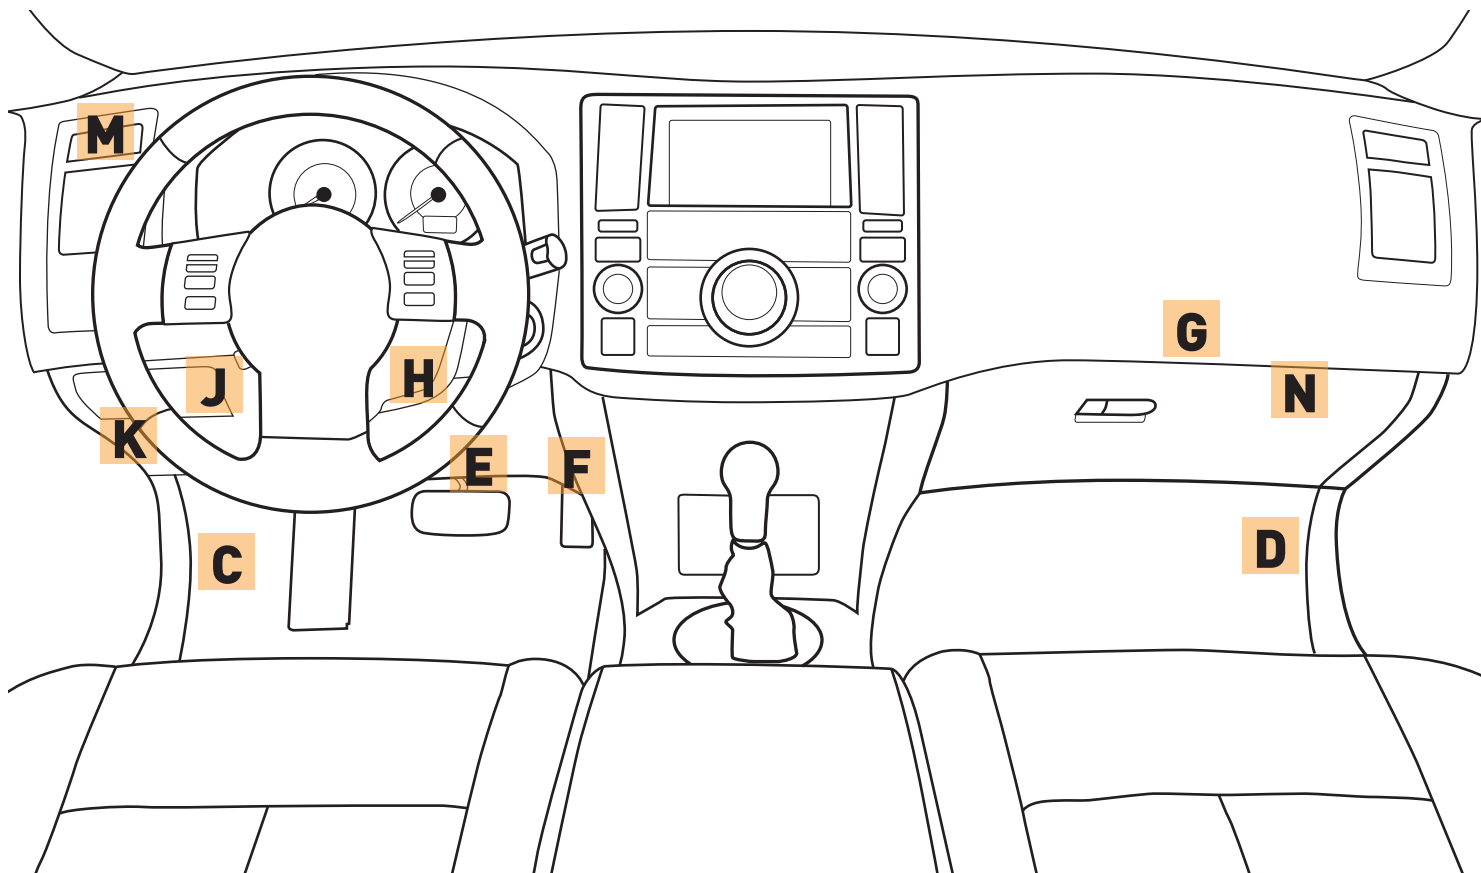

TYPE 1 - WIRE CROSS REFERENCE CHART - 1 OF 1

MAKE	MODEL	YEAR	WIRE DESCRIPTION	CONNECTOR NAME	CONNECTOR COLOR	CONNECTOR TYPE	POSITION	WIRE COLOR	POLARITY	MODULE LOCATION	COMPONENT LOCATOR
INFINITI	FX35	03-04	CanH	~	~	16 pin	6	Blue	(DATA)	OBDII connector	~
			CanL	~	~	16 pin	14	Red	(DATA)	OBDII connector	~
			Security Light	M3	~	40 pin	23	Green/Orange	(-)	In Driver Kick Panel	C
	FX45	03-04	CanH	~	~	16 pin	6	Blue	(DATA)	OBDII connector	~
			CanL	~	~	16 pin	14	Red	(DATA)	OBDII connector	~
			Security Light	M3	~	40 pin	23	Green/Orange	(-)	In Driver Kick Panel	C
	Q45	05-06	CanH	~	~	16 pin	6	Blue	(DATA)	OBDII connector	~
			CanL	~	~	16 pin	14	Pink	(DATA)	OBDII connector	~
			Security Light	M4	~	40 pin	65	Green	(-)	In Driver Kick Panel	C
NISSAN	350Z	05	CanH	~	~	16 pin	6	Blue	(DATA)	OBDII connector	~
			CanL	~	~	16 pin	14	Pink	(DATA)	OBDII connector	~
			Security Light	M90	~	40 pin	23	Green/Orange	(-)	In Driver Kick Panel	C
	Murano	05-07	CanH	~	~	16 pin	6	Blue	(DATA)	OBDII connector	~
			CanL	~	~	16 pin	14	Yellow	(DATA)	OBDII connector	~
			Security Light	M34	~	40 pin	23	Green/Orange	(-)	Right Of Steering Column	H
NISSAN	Titan	04	CanH	~	~	16 pin	6	White	(DATA)	OBDII connector	~
			CanL	~	~	16 pin	14	Red	(DATA)	OBDII connector	~
			Security Light	M18	~	40 pin	23	Green/Orange	(-)	Right Of Steering Column	H

TYPE 1 - WIRING DIAGRAM - 1 OF 1

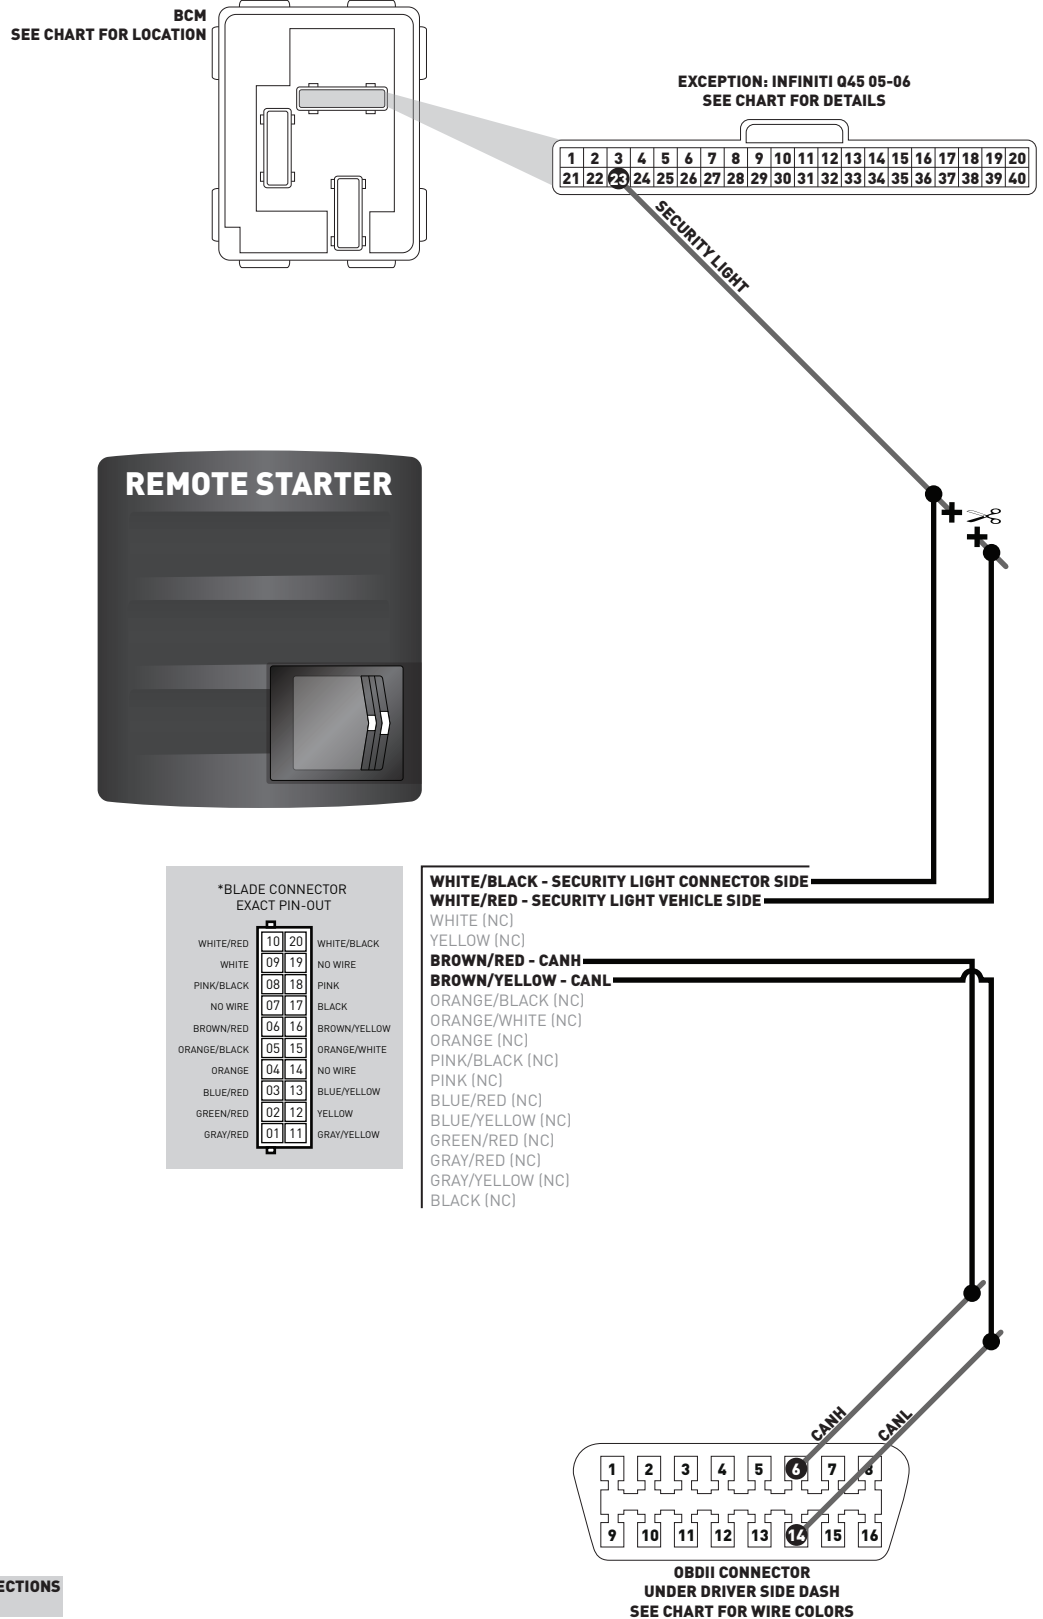


STANDARD 12 VOLT, GROUND AND IGNITION SWITCH CONNECTIONS ARE STILL REQUIRED FROM THE REMOTE STARTER.

TYPE 2 - WIRE CROSS REFERENCE CHART - 1 OF 1

MAKE	MODEL	YEAR	WIRE DESCRIPTION	CONNECTOR NAME	CONNECTOR COLOR	CONNECTOR TYPE	POSITION	WIRE COLOR	POLARITY	MODULE LOCATION	COMPONENT LOCATOR
INFINITI	FX35 Intelli-key	03-04	CanH	~	~	16 pin	6	Blue	(DATA)	OBDII connector	~
			CanL	~	~	16 pin	14	Pink	(DATA)	OBDII connector	~
			Intelli-key	M34	~	40 pin	6	Green/Red	(+)	Right of steering column above gas pedal	F
			Security Light	M3	~	40 pin	23	Green/Orange	(-)	At BCM in passenger kick panel	D
INFINITI	FX45 Intelli-key	03-04	CanH	~	~	16 pin	6	Blue	(DATA)	OBDII connector	~
			CanL	~	~	16 pin	14	Pink	(DATA)	OBDII connector	~
			Intelli-key	M34	~	40 pin	6	Green/Red	(+)	Right of steering column above gas pedal	F
			Security Light	M3	~	40 pin	23	Green/Orange	(-)	At BCM in passenger kick panel	D
NISSAN	Murano Intelli-key	05-07	CanH	~	~	16 pin	6	Blue	(DATA)	OBDII connector	~
			CanL	~	~	16 pin	14	Yellow	(DATA)	OBDII connector	~
			Intelli-key	M99	~	40 pin	6	Green	(+)	Behind glove box, near "A" Pillar	N
			Security Light	M35	~	40 pin	23	Green/Orange	(-)	Right of steering column	H

TYPE 2 - WIRING DIAGRAM - 1 OF 1

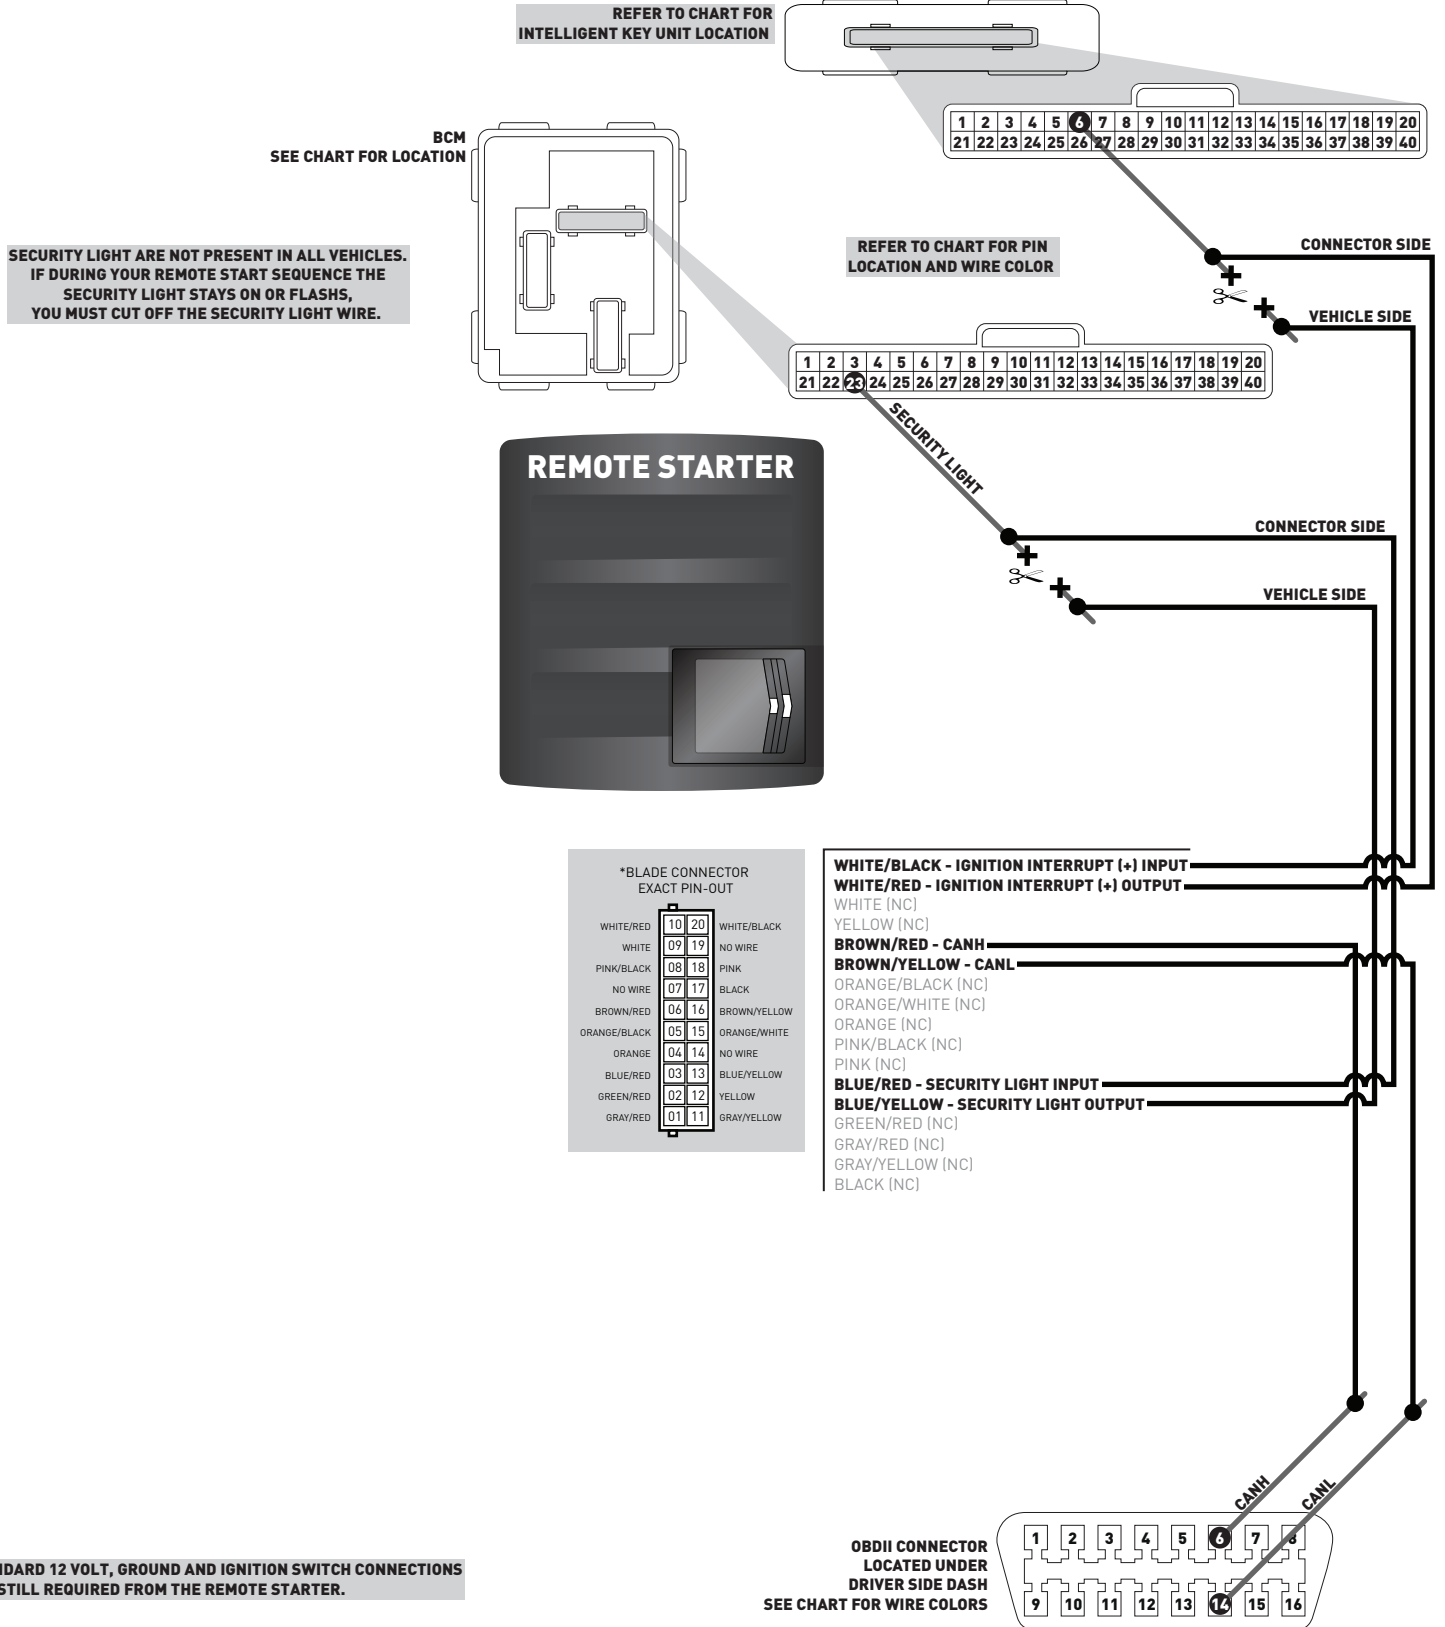


STANDARD 12 VOLT, GROUND AND IGNITION SWITCH CONNECTIONS ARE STILL REQUIRED FROM THE REMOTE STARTER.

TYPE 3 - WIRE CROSS REFERENCE CHART - 1 OF 1

MAKE	MODEL	YEAR	WIRE DESCRIPTION	CONNECTOR NAME	CONNECTOR COLOR	CONNECTOR TYPE	POSITION	WIRE COLOR	POLARITY	MODULE LOCATION	COMPONENT LOCATOR
INFINITI	G35 Sedan	03-04	CanH	~	~	16 pin	70	Blue	(DATA)	OBDII connector	~
			CanL	~	~	16 pin	71	Red	(DATA)	OBDII connector	~
			Security Light	M3	~	24 pin	55	Green/Orange	(-)	In Driver Kick Panel	C
INFINITI	G35 Coupe	03-04	CanH	~	~	16 pin	70	Blue	(DATA)	OBDII connector	~
			CanL	~	~	16 pin	71	Red	(DATA)	OBDII connector	~
			Security Light	M3	~	24 pin	55	Green/Orange	(-)	In Driver Kick Panel	C
NISSAN	350Z	03-04	CanH	~	~	16 pin	70	Blue	(DATA)	OBDII connector	~
			CanL	~	~	16 pin	71	Red	(DATA)	OBDII connector	~
			Security Light	M3	~	24 pin	55	Green/Orange	(-)	In Driver Kick Panel	C
	Murano	03-04	CanH	~	~	16 pin	70	Blue	(DATA)	OBDII connector	~
			CanL	~	~	16 pin	71	Yellow	(DATA)	OBDII connector	~
			Security Light	M37	~	24 pin	55	Green/Orange	(-)	Right Of Steering Column	H


TYPE 3 - WIRING DIAGRAM - 1 OF 1

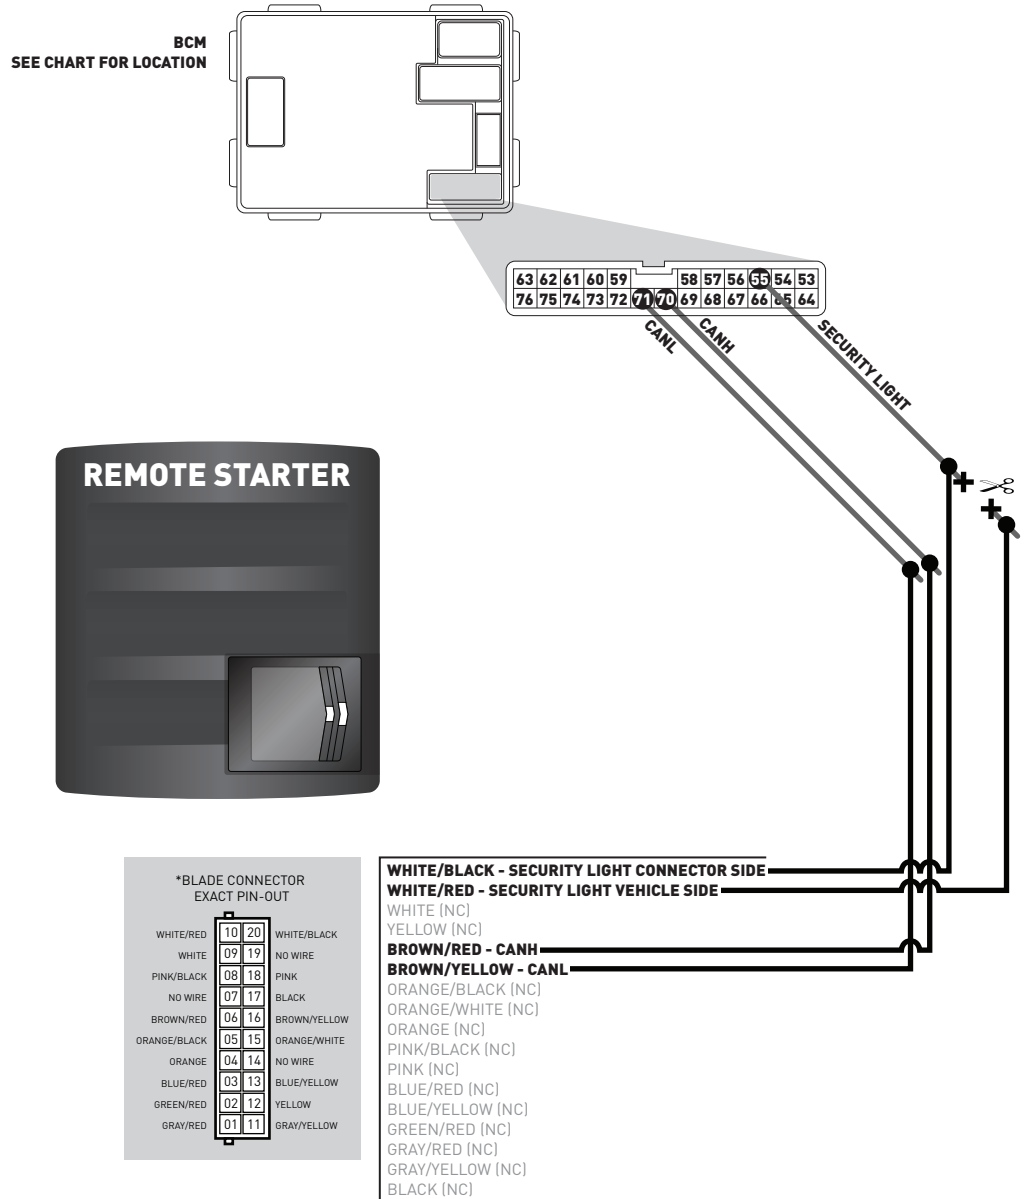

STANDARD 12 VOLT, GROUND AND IGNITION SWITCH CONNECTIONS ARE STILL REQUIRED FROM THE REMOTE STARTER.

CARTRIDGE INSTALLATION

1




Slide cartridge into unit. Notice button under LED.

2

Ready for Module Programming Procedure.


MODULE PROGRAMMING PROCEDURE

1




Insert key into ignition.

2




Turn key to ON position.

3



Wait, LED will turn solid BLUE for **2 seconds**.

4



Turn key to OFF position.

5

Module Programming Procedure completed.

IDENTIFY VEHICLE YEAR

1 Locate the Vehicle Identification Number (VIN), identify the 10th character then match it to its corresponding year.



A	1980	L	1990	Y	2000	A	2010	L	2020
B	1981	M	1991	1	2001	B	2011	M	2021
C	1982	N	1992	2	2002	C	2012	N	2022
D	1983	P	1993	3	2003	D	2013	P	2023
E	1984	R	1994	4	2004	E	2014	R	2024
F	1985	S	1995	5	2005	F	2015	S	2025
G	1986	T	1996	6	2006	G	2016	T	2026
H	1987	V	1997	7	2007	H	2017	V	2027
J	1988	W	1998	8	2008	J	2018	W	2028
K	1989	X	1999	9	2009	K	2019	X	2029

MODULE DIAGNOSTICS

LED STATUS	DIAGNOSTICS		
	DURING PROGRAMMING	DURING REMOTE START	WITH IGNITION OFF
Flashing RED	Missing/wrong information from firmware or vehicle	Incorrectly programmed	Incorrectly programmed or connected
Solid RED	Waiting for more vehicle information	Incorrectly programmed	Not programmed waiting for more vehicle information
Flashing BLUE	Additional steps required to complete programming	Correctly programmed and operational	False ground when running status from remote starter
Solid BLUE then OFF	Correctly programmed	Reset in progress	Reset in progress
OFF	No activity or already programmed	Invalid ground when running status from remote starter	At rest and ready for a remote start sequence

FACTORY RESET PROCEDURE

- DISCONNECT** cartridge from remote starter.
- PRESS AND HOLD** programming button while re-connecting cartridge to remote starter.

- LED will flash red. Immediately **RELEASE** programming button.
- LED will turn solid red for 2 seconds.
RESET COMPLETED.
- RECONNECT** all connectors. Repeat programming procedure.

! Failure to follow procedure may result with a DTC or a CHECK ENGINE error message.